

EXPLORER CASES

EXPLORER
CASES

HARD CASES

MADE IN ITALY



www.explorercases.com

EN
24

BUILT STRONGER...

The **WIDEST** range of **WATERPROOF** cases **MADE IN ITALY**



WATERTIGHT



ULTRA LIGHT



INTERSTACKABLE



CORROSIONPROOF



TEMP RATING
-33°C/+90°C



SAND & DUST
PROOF



SHOCKPROOF



DESIGNED FOR
MILITARY USE



AIRTIGHT



GUARANTEED
PROTECTION

TO LAST LONGER



Explorer Cases first of their kind to be made in Italy by GT LINE, the European leader in technical cases manufacturing since 1970.

Our range of virtually indestructible waterproof cases provides a reliable solution for any equipment requiring a high level of protection. Applications range from Photo and Video equipment transportation to Medical, Aerospace and Defense applications where our cases, strong of their dustproof and waterproof qualities, offer absolute protection to its content making them ideal for use in the harshest environment. All Explorer Cases are subjected to a rigorous series of controlled laboratory tests to grant their suitability for use in the most extreme and hazardous environments, all of them Certified according to IP67 Dustproof - Waterproof; Defence Standard 81-41 Level J; STANAG 4280 (edition 2); Conformity with the Directive 2002/95/EC - MIL-STD 810F/810G (depending on models).



Our products are manufactured in our state-of-the-art facilities under strict ISO 9001:2015 Quality Control System and with a particular attention to reduce the environmental performance impact of our production processes by carefully managing our environmental responsibilities in a systematic manner.



FEATURES:

1. REINFORCED CORNERS
2. SINGLE BLOCK O-RING SEAL
3. REMOVABLE LID (on certain models)
4. CORROSION PROOF METAL PINS
5. UNIQUE COPOLYMER PP INJECTION MOLDED BODY
6. SELF OILING WHEELS (on certain mod.)
7. ERGONOMICALLY DESIGNED HANDLE
8. PRESSURE RELEASE VALVE
9. CUSTOMIZABLE NAME TAG
- ** 10. PRECUBED FOAM LAYERS
- ** 11. CONVOLUTED FOAM IN THE LID
12. PADLOCK POINTS WITH METAL REINFORCEMENT (on certain models)
13. SECURE EASY TO OPEN LATCHES
14. POSITIVE STACKING LOCATION



*STANDARD COLORS



PRECUBED FOAM

Standard models available empty or with layers of precubed foam in the bottom and convoluted foam in the lid. Custom foams on demand.

HL SERIES

Introducing **HEAVENLY LIGHT**, the new standard for lightweight cases with no compromise on durability and reliability. Thanks to our innovative high performance patented plastic resin, **HEAVENLY LIGHT** featuring an improved strength and over 30% less weight. Look for this logo to easily identify them among our many EXPLORER CASES models.


OUR SUPERIOR FEATURES

- Made of exclusive patented formula Copolymer Polypropylene compound, to guarantee strongest performances
- Waterproof, resistant to chemicals, humidity, dust
- Resistant to harsh temperatures (-33°C / +90°C)
- Jam-free purge valve and latches
- Recommended for professional applications
- 100% made in Italy: Italian design and proven functionality
- First to achieve the new military standard qualifications
- Recognized as the most versatile case to customize
- Widest choice of accessories
- Incorporate a number of patented innovations
- All available empty or with "pick & pluck" foam layers



1908		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	190	125	85	20	65						
	in	7 1/2	4 15/16	3 3/8	13/16	2 9/16						
External dim.	mm	216	180	102								
	in	8 1/2	7 1/16	4								
Weight empty		kg 0,70			lbs 1.54							
Weight w/foam		kg 0,80			lbs 1.76							
Volume		lt 2,0			gal 0.52							
Buoyancy		kg/max 1,4			lbs/max 3.08							
Temp. rating		°C min -33 max +90			°F min -27.4 max +194							
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV1908



1913		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	190	125	135	20	115						
	in	7 1/2	4 15/16	5 5/16	13/16	4 1/2						
External dim.	mm	216	180	152								
	in	8 1/2	7 1/16	6								
Weight empty	kg	0,85		lbs 1.87								
Weight w/foam	kg	0,92		lbs 2.02								
Volume	lt	3,2		gal 0.79								
Buoyancy	kg/max	2,4		lbs/max5.29								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV1913



2209		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	220	160	95	20	75						
	in	8 11/16	6 5/16	3 3/4	13/16	2 15/16						
External dim.	mm	246	215	112								
	in	9 11/16	8 7/16	4 7/16								
Weight empty	kg 0,88			lbs 1.94								
Weight w/foam	kg 0,99			lbs 2.18								
Volume	lt 3,3			gal 0.79								
Buoyancy	kg/max 2,3			lbs/max 5.07								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV2209

SUGGESTED OPTIONAL ACCESSORIES	
2209	2214
DIV2209	DIV2214



2214		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	220	160	145	20	125
	in	8 11/16	6 5/16	5 11/16	13/16	4 15/16
External dim.	mm	246	215	162		
	in	9 11/16	8 7/16	6 3/8		
Weight empty	kg 1,16			lbs 2.56		
Weight w/foam	kg 1,29			lbs 2.84		
Volume	lt 5,1			gal 1.32		
Buoyancy	kg/max 3,9			lbs/max 8.59		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Version	B	O	G	D	N	Y
Color						

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV2214

OUR FULL WARRANTY

"We want you to count on your Explorer as the most reliable case to carry your valuable equipment in the harshest environments. That's why we guarantee our cases against breakage of materials and defects on workmanship that could affect the integrity of what you carry inside.

After all, it is not by coincidence that all of our cases have met the most rigorous military standard qualifications and are used worldwide in extremely harsh and demanding environments."

** Warranty valid according to EU laws, only if the case has not been subjected to abuse, misuse, negligence or alteration. See full details on www.explorercases.com



Anti tilt support

2712		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	276	200	120	35	85						
	in	10 7/8	7 7/8	4 3/4	1 3/8	3 3/8						
External dim.	mm	305	270	144								
	in	12	10 5/8	5 11/16								
Weight empty	kg 1,62			lbs 3.57								
Weight w/foam	kg 1,83			lbs 4.03								
Volume	lt 6,6			gal 1.58								
Buoyancy	kg/max 4,2			lbs/max 9.25								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off

- Can accommodate BAG-R, DIV2712 and PANEXPL27

SUGGESTED OPTIONAL ACCESSORIES		
2712	BAG-R	DIV2712
PANEXPL27		

SUGGESTED OPTIONAL ACCESSORIES		
2712HL	BAG-R	DIV2712
PANEXPL27HL		

HL SERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

2712HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	276	200	120	35	85						
	in	10 7/8	7 7/8	4 3/4	1 3/8	3 3/8						
External dim.	mm	316	270	143								
	in	12 7/16	10 5/8	5 5/8								
Weight empty	kg 1,32			lbs 2.91								
Weight w/foam	kg 1,46			lbs 3.21								
Volume	lt 6,6			gal 1.74								
Buoyancy	kg/max 4,2			lbs/max 9.25								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off

- Anti tilt support

- Can accommodate BAG-R, DIV2712 and PANEXPL27HL



Automatic purge valve



Anti tilt support

2717		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	276	200	170	35	135						
	in	10 7/8	7 7/8	6 11/16	1 3/8	5 5/16						
External dim.	mm	305	270	194								
	in	12	10 5/8	7 5/8								
Weight empty	kg 1,93			lbs 4.25								
Weight w/foam	kg 2,12			lbs 4.67								
Volume	lt 9,3			gal 2.37								
Buoyancy	kg/max 6,7			lbs/max 14.77								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Can accommodate BAG-S, DIV2717 and PANEXPL27

SUGGESTED OPTIONAL ACCESSORIES		
2717	BAG-S	DIV2717
PANEXPL27		

SUGGESTED OPTIONAL ACCESSORIES		
2717HL	BAG-S	DIV2717
PANEXPL27HL		



Automatic purge valve

HLSERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

2717HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	276	200	170	35	135						
	in	10 7/8	7 7/8	6 11/16	1 3/8	5 5/16						
External dim.	mm	316	270	192								
	in	12 7/16	10 5/8	7 9/16								
Weight empty	kg	1,54		lbs 3.39								
Weight w/foam	kg	1,75		lbs 3.85								
Volume	lt	9,4		gal 2.48								
Buoyancy	kg/max	6,7		lbs/max 14.77								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Anti tilt support
- Can accommodate BAG-S, DIV2717 and PANEXPL27HL

LET'S RELY ON



Can be stored in vertical position

HLSERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

3005		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	300	210	58	20	38						
	in	11 13/16	8 1/4	2 5/16	13/16	1 1/2						
External dim.	mm	326	269	75								
	in	12 13/16	10 9/16	2 15/16								
Weight empty	kg 1,10			lbs 2.42								
Weight w/foam	kg 1,20			lbs 2.64								
Volume	lt 4			gal 1.05								
Buoyancy	kg/max 2,10			lbs/max 4.62								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)



Anti tilt support



Art. SHOULDERKIT.U



Manual pressure release valve



HLSERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

3110HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	310	100	108	20	88						
	in	12 3/16	3 15/16	4 1/4	13/16	3 7/16						
External dim.	mm	336	159	127								
	in	13 1/4	6 1/4	5								
Weight empty		kg 0,95		lbs 2.09								
Weight w/foam		kg 1,05		lbs 2.31								
Volume		lt 3,4		gal 0.89								
Buoyancy		kg/max 2,5		lbs/max 5.51								
Temp. rating		°C min -33 max +90		°F min -27.4 max +194								
*Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)										
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Anti tilt support



Manual pressure release valve

THE BEST PROTECTION



3317		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	330	234	170	68	102						
	in	13	9 3/16	6 11/16	2 11/16	4						
External dim.	mm	360	304	194								
	in	14 3/16	11 15/16	7 5/8								
Weight empty	kg 2,29			lbs 5.04								
Weight w/foam	kg 2,51			lbs 5.53								
Volume	lt 13,1			gal 3.43								
Buoyancy	kg/max 7,0			lbs/max 15.43								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Can accommodate BAG-T, DIV3317 and PANEXPL33



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES		
3317	BAG-T	DIV3317
PANEXPL33		



Automatic purge valve

HLSERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

3317HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	330	234	170	68	102						
	in	13	9 3/16	6 11/16	2 11/16	4						
External dim.	mm	360	304	192								
	in	14 3/16	11 15/16	7 9/16								
Weight empty	kg	1,78		lbs 3.92								
Weight w/foam	kg	2,02		lbs 4.45								
Volume	lt	13,1		gal 3.46								
Buoyancy	kg/max	7,1		lbs/max 15.65								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Can accommodate BAG-T, DIV3317 and PANEXPL33HL



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES		
3317HL	BAG-T	DIV3317
PANEXPL33HL		

TO EXPLORE THE WORLD



3317W		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	330	350	170	68	102						
	in	13	13 3/4	6 11/16	2 11/16	4						
External dim.	mm	360	420	194								
	in	14 3/16	16 9/16	7 5/8								
Weight empty	kg 2,92			lbs 6.43								
Weight w/foam	kg 3,30			lbs 7.27								
Volume	lt 19,6			gal 5.17								
Buoyancy	kg/max 10,6			lbs/max 23.36								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Can accommodate BAG-U, DIV3317W and PANEXPL33W



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES		
3317W	BAG-U	DIV3317W
PANEXPL33W		



HL SERIES		HEAVENLY LIGHT
		• Improved strength • Over 30% lighter

3815HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	380	270	155	47	108						
	in	14 15/16	10 5/8	6 1/8	1 7/8	4 1/4						
External dim.	mm	420	340	177								
	in	16 9/16	13 3/8	6 15/16								
Weight empty	kg 2,20			lbs 4.85								
Weight w/foam	kg 2,53			lbs 5.57								
Volume	lt 15,9			gal 4.2								
Buoyancy	kg/max 10			lbs/max 22.04								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Soft grip rubber handle
- Can accommodate PANEXPL38HL



Anti tilt support



Automatic purge valve

SUGGESTED OPTIONAL ACCESSORIES	
3815HL	PANEXPL38HL

AND BEYOND



3818		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	380	270	180	47	133						
	in	14 15/16	10 5/8	7 1/16	1 3/4	5 5/16						
External dim.	mm	410	340	205								
	in	16 1/8	13 3/8	8 1/16								
Weight empty	kg 3,14			lbs 6.92								
Weight w/foam	kg 3,58			lbs 7.89								
Volume	lt 18,4			gal 4.75								
Buoyancy	kg/max 12,4			lbs/max 27.33								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Soft grip rubber handle
- Can accommodate BAG-E, DIV3818 and PANEXPL38



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES		
3818	BAG-E	DIV3818
PANEXPL38		



Automatic purge valve

HL SERIES **HEAVENLY LIGHT**

- Improved strength
- Over 30% lighter

3818HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	380	270	180	47	133						
	in	14 15/16	10 5/8	7 1/16	1 7/8	5 1/4						
External dim.	mm	420	340	202								
	in	16 9/16	13 3/8	7 15/16								
Weight empty	kg 2,26			lbs 4.98								
Weight w/foam	kg 2,66			lbs 5.86								
Volume	lt 18,5			gal 4.88								
Buoyancy	kg/max 12,3			lbs/max 27.11								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Soft grip rubber handle
- Can accommodate BAG-E, DIV3818 and PANEXPL38HL



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES		
3818HL	BAG-E	DIV3818
PANEXPL38HL		

MADE FOR THE HARSHTEST



HLSERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

3823HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	380	270	230	57	173						
	in	14 15/16	10 5/8	9 1/16	2 1/4	6 13/16						
External dim.	mm	420	340	252								
	in	16 9/16	13 3/8	9 15/16								
Weight empty	kg 2,59			lbs 5.71								
Weight w/foam	kg 3,09			lbs 6.81								
Volume	lt 23,6			gal 6.23								
Buoyancy	kg/max 16			lbs/max 35.27								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												


- Soft grip rubber handle
- Can accommodate PANEXPL38HL



Anti tilt support



Automatic purge valve



CONDITIONS



Automatic purge valve



4209HL.B C

includes:

- computer bag with shoulder strap (art. BAG-PC42)
- organized lid panel (art. PANEXPL42)



HLSERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

4209HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	420	300	95	35	60						
	in	16 9/16	11 13/16	3 3/4	1 3/8	2 3/8						
External dim.	mm	457	366	118								
	in	18	14 7/16	4 5/8								
Weight empty	kg 2,2			lbs 4.85								
Weight w/foam	kg 2,6			lbs 5.73								
Weight w/pc bag	kg 2,8			lbs 6.17								
Volume	lt 12,0			gal 3.17								
Buoyancy	kg/max 6,8			lbs/max 14.99								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												
Version	BC											
Laptop bag												

- New pull release latch grants additional safety, drop test proof
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Can accommodate BAG-PC42 and PANEXPL42
- Lid can be set to slide-off
- Soft grip rubber handle

SUGGESTED OPTIONAL ACCESSORIES

4209HL-4216HL	BAG-PC42
PANEXPL42	

HLSERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

4216HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	420	300	160	35	125						
	in	16 9/16	11 13/16	6 5/16	1 3/8	4 15/16						
External dim.	mm	457	366	183								
	in	18	14 7/16	7 3/16								
Weight empty		kg 2,6		lbs 5.73								
Weight w/foam		kg 3,2		lbs 7.05								
Volume		lt 20,6		gal 5.44								
Buoyancy		kg/max 14,2		lbs/max 31.30								
Temp. rating		°C min -33 max +90		°F min -27.4 max +194								
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)										
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Soft grip rubber handle
- New pull release latch grants additional safety, drop test proof
- Optional shoulder strap available (Art. SHOULDERSKIT.U)
- Can accommodate BAG-PC42 and PANEXPL42



4412		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	445	345	125	47	78						
	in	17 1/2	13 9/16	4 15/16	1 7/8	3 1/16						
External dim.	mm	474	415	149								
	in	18 11/16	16 5/16	5 7/8								
Weight empty	kg 3,40			lbs 7.49								
Weight w/foam	kg 3,90			lbs 8.59								
Volume	lt 19,2			gal 5.01								
Buoyancy	kg/max 10,7			lbs/max 23.58								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-PC44, DIV4412 and PANEXPL44

SUGGESTED OPTIONAL ACCESSORIES		
4412	BAG-PC44	DIV4412
PANEXPL44		
		

SUGGESTED OPTIONAL ACCESSORIES		
4412HL	BAG-PC44	DIV4412
PANEXPL44HL		
		



HL SERIES HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

4412HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	445	345	125	47	78						
	in	17 1/2	13 9/16	4 15/16	1 7/8	3 1/16						
External dim.	mm	485	414	149								
	in	19 1/8	16 5/16	5 7/8								
Weight empty		kg 2,50		lbs 5.51								
Weight w/foam		kg 2.92		lbs 6.43								
Weight w/pc bag		kg 3,22		lbs 7.09								
Volume		lt 19,2		gal 5.07								
Buoyancy		kg/max 10,8		lbs/max 23.80								
Temp. rating		°C min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												
Version	BC		GC									
Laptop bag												

- 4412HL.B C and 4412HL.G C include:
- case mod. 4412HL.B E or 4412HL.G E
 - computer bag (art. BAG-PC44)
 - lid panel (art. PANEXPL44HL)
 - shoulder strap (art. SHOULDERKIT.U)

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Soft grip rubber handle
- Anti tilt support
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-PC44, DIV4412 and PANEXPL44HL

4412HL.B C

4412HL.G C



Art. SHOULDERKIT.U

4419		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	445	345	190	47	143						
	in	17 1/2	13 9/16	7 1/2	1 7/8	5 5/8						
External dim.	mm	474	415	214								
	in	18 11/16	16 5/16	8 7/16								
Weight empty	kg 4,00			lbs 8.81								
Weight w/foam	kg 4,70			lbs 10.36								
Volume	lt 29,2			gal 7.66								
Buoyancy	kg/max 19,7			lbs/max 43.43								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-A, DIV4419 and PANEXPL44

SUGGESTED OPTIONAL ACCESSORIES		
4419	BAG-A	DIV4419
PANEXPL44		

SUGGESTED OPTIONAL ACCESSORIES		
4419HL	BAG-A	DIV4419
PANEXPL44HL		



Anti tilt support

Automatic purge valve

HL SERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

4419HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	445	345	190	47	143						
	in	17 1/2	13 9/16	7 1/2	1 7/8	5 5/8						
External dim.	mm	485	414	212								
	in	19 1/8	16 5/16	8 3/8								
Weight empty		kg 2,91		lbs 6.41								
Weight w/foam		kg 3,58		lbs 7.89								
Volume		lt 29,2		gal 7.71								
Buoyancy		kg/max 19,8		lbs/max 43.65								
Temp. rating		°C min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-A, DIV4419 and PANEXPL44HL



4820		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	480	370	205	50	155						
	in	18 7/8	14 9/16	8 1/16	1 15/16	6 1/8						
External dim.	mm	520	435	230								
	in	20 1/2	17 1/8	9 1/16								
Weight empty	kg 4,64			lbs 10.22								
Weight w/foam	kg 5,40			lbs 11.90								
Volume	lt 35,5			gal 9.24								
Buoyancy	kg/max 24,7			lbs/max 54.45								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
	MIL-STD 810G											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Soft grip rubber handle
- Stainless steel reinforced padlockable points
- Can accommodate BAG-F, DIV4820 or BAG-PC48 and PANEXPL48

Art. BAG-PC48



SUGGESTED OPTIONAL ACCESSORIES	
4820	BAG-F
PANEXPL48	
BAG-PC48	DIV4820



HL SERIES HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

4820HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	480	370	205	50	155						
	in	18 7/8	14 9/16	8 1/16	1 15/16	6 1/8						
External dim.	mm	520	440	230								
	in	20 1/2	17 5/16	9 1/16								
Weight empty	kg 3,41			lbs 7.51								
Weight w/foam	kg 4,17			lbs 9.19								
Volume	lt 36,4			gal 9.61								
Buoyancy	kg/max 24,8			lbs/max 54.67								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810G											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

SUGGESTED OPTIONAL ACCESSORIES	
4820HL	BAG-F
PANEXPL48HL	
BAG-PC48	DIV4820

- Soft grip rubber handle
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Can accommodate BAG-F, DIV4820 or BAG-PC48 and PANEXPL48HL

WHEELED HARD CASES

HLSERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

4825HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	480	370	255	50	205
	in	18 7/8	14 9/16	10 1/16	1 15/16	8 1/16
External dim.	mm	520	440	276		
	in	20 1/2	17 5/16	10 7/8		
Weight empty	kg 4,5			lbs 9.92		
Weight w/foam	kg 5,3			lbs 11.68		
Volume	lt 39			gal 10.30		
Buoyancy	kg/max 28,2			lbs/max 62.17		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810G					
Version	B	O	G	D	N	Y
Color						

- Soft grip rubber handle
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Can accommodate BAG-F, DIV4820 or BAG-PC48 and PANEXPL48HL



Robust telescopic handle



Wheels with bearings



Automatic purge valve



Optional shipping label holder (Art. KIN.1224)

SUGGESTED OPTIONAL ACCESSORIES	
4825HL	BAG-F
PANEXPL48HL	
BAG-PC48	DIV4820



OUR CABIN CASES



5117		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	517	277	173	50	123						
	in	20 3/8	10 7/8	6 13/16	1 15/16	4 13/16						
External dim.	mm	546	347	197								
	in	21 1/2	13 11/16	7 3/4								
Weight empty	kg 3,80			lbs 8.37								
Weight w/foam	kg 4,50			lbs 9.92								
Volume	lt 24,7			gal 6.34								
Buoyancy	kg/max 15,8			lbs/max 34.83								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Soft grip rubber handle
- Can accommodate BAG-B, DIV51 and PANEXPL51

SUGGESTED OPTIONAL ACCESSORIES		
5117-5122	BAG-B	DIV51
PANEXPL51		
		



5122		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	517	277	217	50	167						
	in	20 3/8	10 7/8	8 9/16	1 15/16	6 9/16						
External dim.	mm	546	347	247								
	in	21 1/2	13 11/16	9 3/4								
Weight empty	kg 6,00			lbs 13.22								
Weight w/foam	kg 7,00			lbs 15.43								
Volume	lt 31,0			gal 8.18								
Buoyancy	kg/max 21,5			lbs/max 47.39								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Soft grip rubber handle and retractable handle
- Wheels with bearings
- Can accommodate BAG-B, DIV51 and PANEXPL51



Easy to open release retractable handle

5140: THE SMART CASE

The Explorer mod. 5140 is the ideal scalable solution for transporting and protecting tools, parts and components, within a ruggedized waterproof trolley case, upgraded with the black reinforced telescopic trolley handle and silent wheels.

It's available in two main versions: to contain drawers or to contain complete boxes (organizers). Many different internal configurations are possible, by combining the empty or foam filled drawers, or the boxes and the wide range of optional accessories. See full details on www.explorercases.com. The Explorer mod. 5140 makes the ideal companion for the professionals of the maintenance, for the medical field, defense and aviation markets.



THIS PRODUCT
IS POWERED BY
INTELLIRESPOND.

The free App that allows for personal
inventory and control of the content.
www.intellirespond.com



Telescopic handle



4 top lid latches



Padlockable points



Folding side handles



4 silent self-oiling wheels



Removable frontal lid



Optional small translucent shockproof
PP component boxes.



Removable top lid




Automatic valve



4 front door latches



All drawers come out
completely



Front lid can be
opened up to 180°

PRESET MODELS

O-rings on upper and frontal lids, detachable top and frontal lid, removable tray, I.D. label and RFID/NFC tags.



5140.BKT01.AH

Foam filled drawers
INTERNAL DRAWERS CONFIGURATION
1x30H mm. drawer with bi-color pre-cubed foam
2x60H mm. drawers with bi-color pre-cubed foam
1x95H mm. drawer with bi-color pre-cubed foam



5140.BKT02.AH

Empty drawers
INTERNAL DRAWERS CONFIGURATION
1x30H mm. drawer empty
2x60H mm. drawers empty
1x95H mm. drawer empty



5140.BKT03.AH

Empty drawers
INTERNAL DRAWERS CONFIGURATION
4x30H mm. drawers empty
2x60H mm. drawers empty



5140.BKTE.AH

Empty case - AIDRAW ready
Side rails can fit a maximum of 8 AIDRAW in 10 different configurations (see on pages 21 and 22). Mixed configurations of empty and/or foam filled drawers can be available on demand.



5140.BE.AH

Completely empty



5140X.B

Empty case - AIBOX ready
Side rails can fit a maximum of 7 AIBOX in 8 different configurations (see on pages 21 and 22). Mixed configurations of empty and/or foam filled organizers available on demand.



Art. AIPANEL PLEXI
Optional transparent lid cover. Useful for foam inserts or readable instructions.





Art. AIWHEELS
4 **Optional** pivoting wheels,
2 equipped with brakes.

5140		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
External dim.	mm	581	381	455		
	in	22 7/8	15	17 15/16		
VERSIONS	BKT01.AH	w/foam filled drawers		Weight	kg 13,80	lbs 30.42
	BKT02.AH	w/empty drawers		Weight	kg 13,00	lbs 28.66
	BKT03.AH	w/empty drawers		Weight	kg 13,80	lbs 30.42
	BKTE.AH	AIDRAW ready		Weight	kg 9,75	lbs 21.49
	BE.AH	completely empty		Weight	kg 7,52	lbs 16.57
	X.B	AIBOX ready		Weight	kg 9,75	lbs 21.49
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
Color						

OTHER CONFIGURATIONS

Check the table below to find your empty drawers model configuration (in yellow) or the one with precubed foam (in orange).

AIDRAW STANDARD CONFIGURATIONS TABLE					
					
MODEL	5140.B.8A	5140.B.6AL	5140.BKT03.AH	5140.B.2A3L	5140.B.4L
EMPTY	8 x AIDRAW3.E (H30 mm - 1.2 in)	6 x AIDRAW3.E (H30 mm - 1.2 in)	4 x AIDRAW3.E (H30 mm - 1.2 in)	2 x AIDRAW3.E (H30 mm - 1.2 in)	4 x AIDRAW6.E (H60 mm - 2.4 in)
		1 x AIDRAW6.E (H60 mm - 2.4 in)	2 x AIDRAW6.E (H60 mm - 2.4 in)	3 x AIDRAW6.E (H60 mm - 2.4 in)	
MODEL	5140.B.8C	5140.B.6CM	5140.B.4C2M	5140.B.2C3M	5140.B.4M
WITH FOAM	8 x AIDRAW3.F (H30 mm - 1.2 in)	6 x AIDRAW3.F (H30 mm - 1.2 in)	4 x AIDRAW3.F (H30 mm - 1.2 in)	2 x AIDRAW3.F (H30 mm - 1.2 in)	4 x AIDRAW6.F (H60 mm - 2.4 in)
		1 x AIDRAW6.F (H60 mm - 2.4 in)	2 x AIDRAW6.F (H60 mm - 2.4 in)	3 x AIDRAW6.F (H60 mm - 2.4 in)	
					
MODEL	5140.B.5AR	5140.B.2A2R	5140.B.L2R	5140.BKT02.AH	5140.B.3ALR
EMPTY	5 x AIDRAW3.E (H30 mm - 1.2 in)	2 x AIDRAW3.E (H30 mm - 1.2 in)	1 x AIDRAW6.E (H60 mm - 2.4 in)	1 x AIDRAW3.E (H30 mm - 1.2 in)	3 x AIDRAW3.E (H30 mm - 1.2 in)
	1 x AIDRAW9.E (H95 mm - 3.7 in)	2 x AIDRAW9.E (H95 mm - 3.7 in)	2 x AIDRAW9.E (H95 mm - 3.7 in)	2 x AIDRAW6.E (H60 mm - 2.4 in)	1 x AIDRAW6.E (H60 mm - 2.4 in)
				1 x AIDRAW9.E (H95 mm - 3.7 in)	1 x AIDRAW9.E (H95 mm - 3.7 in)
MODEL	5140.B.5CS	5140.B.2C2S	5140.B.M2S	5140.BKT01.AH	5140.B.3CMS
WITH FOAM	5 x AIDRAW3.F (H30 mm - 1.2 in)	2 x AIDRAW3.F (H30 mm - 1.2 in)	1 x AIDRAW6.F (H60 mm - 2.4 in)	1 x AIDRAW3.F (H30 mm - 1.2 in)	3 x AIDRAW3.F (H30 mm - 1.2 in)
	1 x AIDRAW9.F (H95 mm - 3.7 in)	2 x AIDRAW9.F (H95 mm - 3.7 in)	2 x AIDRAW9.F (H95 mm - 3.7 in)	2 x AIDRAW6.F (H60 mm - 2.4 in)	1 x AIDRAW6.F (H60 mm - 2.4 in)
				1 x AIDRAW9.F (H95 mm - 3.7 in)	1 x AIDRAW9.F (H95 mm - 3.7 in)

Check the table below to find your empty organizer model configuration (in yellow) or the one with precubed foam (in orange).

AIBOX STANDARD CONFIGURATIONS TABLE				
				
MODEL	5140X.B.7A	5140X.B.5AL	5140X.B.4AR	5140X.B.3A2L
EMPTY	7 x AIBOX3.E (H30 mm - 1.2 in)	5 x AIBOX3.E (H30 mm - 1.2 in)	4 x AIBOX3.E (H30 mm - 1.2 in)	3 x AIBOX3.E (H30 mm - 1.2 in)
		1 x AIBOX6.E (H60 mm - 2.4 in)	1 x AIBOX9.E (H95 mm - 3.7 in)	2 x AIBOX6.E (H60 mm - 2.4 in)
MODEL	5140X.B.7C	5140X.B.5CM	5140X.B.4CS	5140X.B.3C2M
WITH FOAM	7 x AIBOX3.F (H30 mm - 1.2 in)	5 x AIBOX3.F (H30 mm - 1.2 in)	4 x AIBOX3.F (H30 mm - 1.2 in)	3 x AIBOX3.F (H30 mm - 1.2 in)
		1 x AIBOX6.F (H60 mm - 2.4 in)	1 x AIBOX9.F (H95 mm - 3.7 in)	2 x AIBOX6.F (H60 mm - 2.4 in)
				
MODEL	5140X.B.2ALR	5140X.B.A3L	5140X.B.A2R	5140X.B.2LR
EMPTY	2 x AIBOX3.E (H30 mm - 1.2 in)	1 x AIBOX3.E (H30 mm - 1.2 in)	1 x AIBOX3.E (H30 mm - 1.2 in)	2 x AIBOX6.E (H60 mm - 2.4 in)
	1 x AIBOX6.E (H60 mm - 2.4 in)	3 x AIBOX6.E (H60 mm - 2.4 in)	2 x AIBOX9.E (H95 mm - 3.7 in)	1 x AIBOX9.E (H95 mm - 3.7 in)
	1 x AIBOX9.E (H95 mm - 3.7 in)			
MODEL	5140X.B.2CMS	5140X.B.C3M	5140X.B.C2S	5140X.B.2MS
WITH FOAM	2 x AIBOX3.F (H30 mm - 1.2 in)	1 x AIBOX3.F (H30 mm - 1.2 in)	1 x AIBOX3.F (H30 mm - 1.2 in)	2 x AIBOX6.F (H60 mm - 2.4 in)
	1 x AIBOX6.F (H60 mm - 2.4 in)	3 x AIBOX6.F (H60 mm - 2.4 in)	2 x AIBOX9.F (H95 mm - 3.7 in)	1 x AIBOX9.F (H95 mm - 3.7 in)
	1 x AIBOX9.F (H95 mm - 3.7 in)			

AIDRAW & AIBOX

Starting from the empty tool chest mod. 5140.BKTE.AH (p. 20) you can build your own internal assortment of drawers (AIDRAW), mixing empty and foam filled ones, respecting the possible combinations as shown on the chart below.

AIDRAW: Shock-proof PP drawers available in 3 different heights, 30, 60 and 95 mm. (1.2, 2.4, 3.7 in.) designed to contain all kinds of components and accessories. Available empty (.E) or with pre-cubed foam (.F).

3 DIFFERENT HEIGHTS

AIDRAW - TABLE				
DESCR.	#	ART.	INT. CONFIG.	INT. DIM. (mm)
DRAWER	A	AIDRAW3.E	EMPTY	467x255xH30
DRAWER	C	AIDRAW3.F	WITH FOAM	467x255xH30
DRAWER	L	AIDRAW6.E	EMPTY	467x255xH60
DRAWER	M	AIDRAW6.F	WITH FOAM	467x255xH60
DRAWER	R	AIDRAW9.E	EMPTY	467x255xH95
DRAWER	S	AIDRAW9.F	WITH FOAM	467x255xH95



EMPTY



PICK & PLUCK FOAM

Starting from the completely empty tool chest mod. 5140X.B (p. 20) you can build your own internal assortment of organizers (AIBOX), mixing empty and foam filled ones, respecting the possible combinations as shown on the chart below.

AIBOX: The ultimate modular solution for the storage, transport and use of sets of spare parts, components and tools. Available in 3 different heights, 30, 60 and 95 mm. (1.2, 2.4, 3.7 in.) they can be stacked positively and can stand in vertical position. The same footprint of both bottom and lid, grants a positive stacking even between organizers of different height. Available completely empty (.E) or with pre-cubed foam (.F).

3 DIFFERENT HEIGHTS

AIBOX - TABLE				
DESCR.	#	ART.	INT. CONFIG.	INT. DIM. (mm)
ORGANIZER	A	AIBOX3.E	EMPTY	467x255xH30
ORGANIZER	C	AIBOX3.F	WITH FOAM	467x255xH30
ORGANIZER	L	AIBOX6.E	EMPTY	467x255xH60
ORGANIZER	M	AIBOX6.F	WITH FOAM	467x255xH60
ORGANIZER	R	AIBOX9.E	EMPTY	467x255xH95
ORGANIZER	S	AIBOX9.F	WITH FOAM	467x255xH95




Translucid fully detachable lid


AVAILABLE
EMPTY OR WITH
"PICK & PLUCK"
FOAM LAYERS

CUSTOMIZE YOUR 5140

AIDRAW CHART - 10 POSSIBLE CONFIGURATIONS - THEY FIT WITH 5140.BKTE.AH MODEL

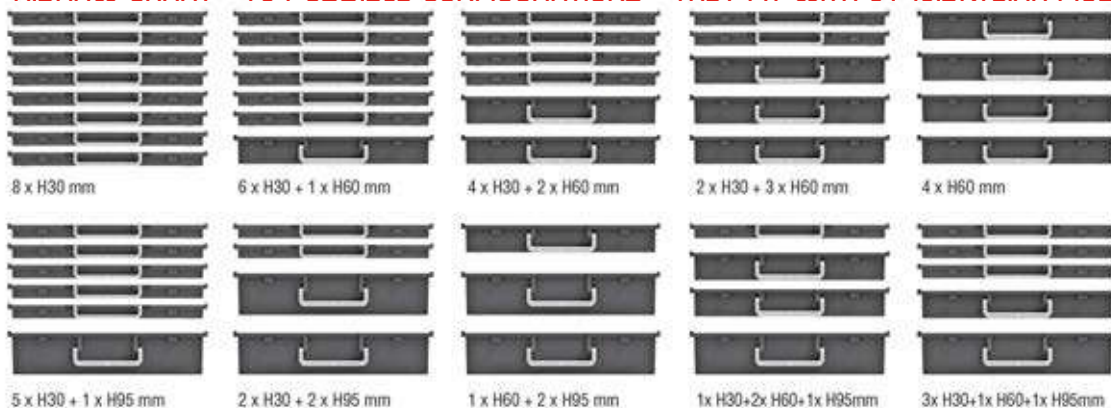

AIBOX CHART - 8 POSSIBLE CONFIGURATIONS - THEY FIT WITH 5140X.B MODEL

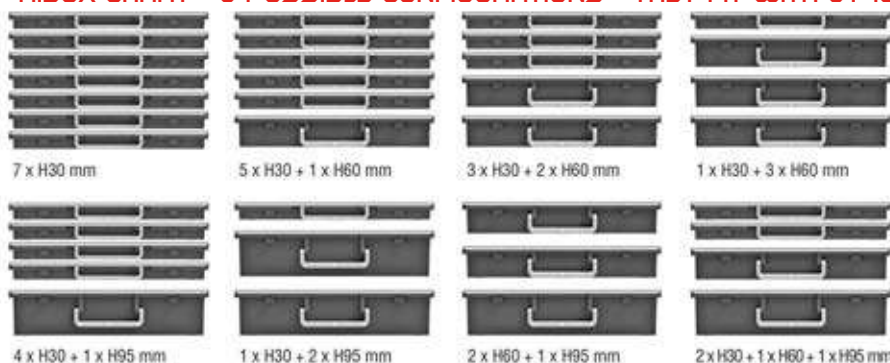

5140 MODULAR SYSTEM



You can now complement your 5140 tool chest with additional storage capacity, with these two new additional modules: 5116 and 5131.

Derived from the same reliability and durability that has made the 5140 worldwide famous, each of these new modules can be used independently as reliable tool-boxes for extra hand tools, power tools and large spare parts, or can be stacked together with the traditional 5140 tool chest, thus creating a professional and roomy trolley system. The Patented easy "Lock-Unlock" system allows each module to be quickly stacked and released from each other, by using the practical one trigger release.

An upgraded lid 5140 LID is available to update your existing, previous generation 5140 tool-chest to the latest design that enables the stack-ability with these new practical modules.



5116.B



5140 LID



The new retrofit-compatible stackable 5140 LID allows all previous versions of the 5140 toolboxes to be connected with 5116 and 5131 modules, providing everybody with the benefits of the new modules' functionality.

Int. Dim.: 516x296x50 mm - 20 5/16x11 5/8x1 15/16 in
Est. Dim.: 585x368x68 mm - 23 1/16x14 1/2x2 11/16 in



5131.B



5116		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	516	296	160	50	110
	in	20 5/16	11 5/8	6 5/16	1 15/16	4 5/16
External dim.	mm	585	368	198		
	in	23 1/16	14 1/2			
Weight empty	kg	3,3			lbs 7.27	
Weight w/foam	kg	3,9			lbs 8.59	
Volume	lt	24,4			gal 6.44	
Buoyancy	kg/max	15,1			lbs/max 33.28	

5131		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	516	296	310	60	250						
	in	20 5/16	11 5/8	12 3/16	2 3/8	9 13/16						
External dim.	mm	585	368	348								
	in	23 1/16	14 1/2	13 11/16								
Weight empty	kg 4,8			lbs 10.58								
Weight w/foam	kg 6			lbs 13.22								
Volume	lt 47,3			gal 12.49								
Buoyancy	kg/max 34,4			lbs/max 75.83								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

TRAVEL LIGHT ON YOUR




HLSERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

5212HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	520	285	125	30	95						
	in	20 1/2	11 1/4	4 15/16	1 3/16	3 3/4						
External dim.	mm	550	350	145								
	in	21 5/8	13 3/4	5 11/16								
Weight empty		kg 2,35		lbs 5.18								
Weight w/foam		kg 2,85		lbs 6.28								
Volume		lt 18,5		gal 4.88								
Buoyancy		kg/max 12,7		lbs/max 27.99								
Temp. rating		°C min -33 max +90		°F min -27.4 max +194								
*Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Soft grip rubber handle
- Automatic purge valve
- Pull release latches
- Stainless steel padlockable points



HLSERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

5215HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	520	285	150	55	95						
	in	20 1/2	11 1/4	5 7/8	2 3/16	3 3/4						
External dim.	mm	550	350	170								
	in	21 5/8	13 3/4	6 11/16								
Weight empty	kg 2,55			lbs 5.62								
Weight w/foam	kg 3,05			lbs 6.72								
Volume	lt 22,2			gal 5.86								
Buoyancy	kg/max 12,7			lbs/max 27.99								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
*Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Soft grip rubber handle
- Automatic purge valve
- Pull release latches
- Stainless steel padlockable points

NEXT FLIGHT



Optional shipping
label holder
(Art. KIN.1224)



BACKPACK CABIN
Adding backpack
transportability to models
5218HL and 5221HL (more
details on page 41)

HLSERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

Complies with low-cost airlines' size restrictions
(always check with the pertinent airline)

5218HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	520	285	180	30	150						
	in	20 1/2	11 1/4	7 1/16	1 3/16	5 7/8						
External dim.	mm	550	350	200								
	in	21 5/8	13 3/4	7 7/8								
Weight empty	kg 3,75			lbs 8.26								
Weight w/foam	kg 4,30			lbs 9.47								
Volume	lt 26			gal 6.86								
Buoyancy	kg/max 20			lbs/max 44.09								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

BOTH 5218HL & 5221HL MODELS

- Lid can be set to slide-off
- Soft grip rubber handle
- Automatic purge valve
- Self-oiling wheels
- Pull release latches
- Retractable handle
- Stainless steel padlockable points
- Optional shipping label holder for both models (Art. KIN.1224)
- Can accommodate DIV52 and PANEXPL52

SUGGESTED OPTIONAL ACCESSORIES

5218HL-5221HL	DIV52
PANEXPL52	

HLSERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

Complies with major airlines' size restrictions
(always check with the pertinent airline)

5221HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	520	285	205	55	150						
	in	20 1/2	11 1/4	8 1/16	2 3/16	5 7/8						
External dim.	mm	550	350	225								
	in	21 5/8	13 3/4	8 7/8								
Weight empty	kg	3,90		lbs 8.59								
Weight w/foam	kg	4,50		lbs 9.92								
Volume	lt	30,3		gal 8.00								
Buoyancy	kg/max	20,0		lbs/max 44.09								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

OUR CERTIFICATIONS



Easy to open release retractable handle

5325		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	538	405	250	60	190
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2
External dim.	mm	607	475	275		
	in	23 7/8	18 11/16	10 13/16		
Weight empty	kg	7		lbs 15.43		
Weight w/foam	kg	8,25		lbs 18.18		
Volume	lt	53		gal 14.00		
Buoyancy	kg/max	37,2		lbs/max 82.01		
Temp. rating	°C	min -33	max +90	°F	min -27.4	max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Version	B	O	G	D	N	Y
Color						

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Can accommodate 2xBAG-V, 2xDIV53, 1xBAG-V+1xDIV53 and PANEXPL53



Two men lift side handles

SUGGESTED OPTIONAL ACCESSORIES	
5325-5326	2x BAG-V
PANEXPL53	
2x DIV53	1x BAG-V + 1x DIV53

5326		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	538	405	250	60	190
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2
External dim.	mm	627	475	292		
	in	24 11/16	18 11/16	11 1/2		
Weight empty	kg	10		lbs 22.04		
Weight w/foam	kg	11,25		lbs 24.80		
Volume	lt	53		gal 14.00		
Buoyancy	kg/max	37,2		lbs/max 82.01		
Temp. rating	°C	min -33	max +90	°F	min -27.4	max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Version	B	O	G	D	N	Y
Color						

- Lid can be set to slide-off
- Stainless steel padlockable points
- Two men lift side handles
- Self-oiling free running wheels
- Soft grip rubber handle
- Can accommodate 2xBAG-V, 2xDIV53, 1xBAG-V+1xDIV53 and PANEXPL53





There are many different kinds of waterproof cases available on the market, but only a few can guarantee the superior features of excellence of Explorer Cases. As a matter of fact, Explorer Cases feature the highest number of patented innovations.

- IP67 Waterproof, dustproof
- Defence Standard 81-41 Level J
- STANAG 4280 (edition 2)

- Conformity with the Directive 2002/95/EC
- MIL-STD 810F/810G (depending on models)
- Nato Stock Number (NSN) on demand

Certificates available for download on www.explorercases.com



5822		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	580	440	220	60	160						
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16						
External dim.	mm	650	510	245								
	in	25 9/16	20 1/16	9 5/8								
Weight empty	kg	7,16		lbs 15.78								
Weight w/foam	kg	8,39		lbs 18.49								
Volume	lt	56,1		gal 14.79								
Buoyancy	kg/max	36,7		lbs/max 80.90								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
	MIL-STD 810F											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles
- Stainless steel reinforced padlockable points
- Can accommodate 2xBAG-G, 2xDIV58, 1xBAG-G+1xDIV58 and PANEXPL58

SUGGESTED OPTIONAL ACCESSORIES	
5822-5823	2x BAG-G
PANEXPL58	
2x DIV58	1x BAG-G + 1x DIV58

Soft grip rubber handle

TOUGH CASES FOR A



5823		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	580	440	220	60	160						
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16						
External dim.	mm	670	510	262								
	in	26 3/8	20 1/16	10 5/16								
Weight empty		kg 9,17		lbs 20.21								
Weight w/foam		kg 10,40		lbs 22.92								
Volume		lt 56,1		gal 14.79								
Buoyancy		kg/max 36,7		lbs/max 80.90								
Temp. rating		°C min -33 max +90		°F min -27.4 max +194								
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)										
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles
- Stainless steel padlockable points
- Self-oiling free running wheels
- Soft grip rubber handle
- Can accommodate 2xBAG-G, 2xDIV58, 1xBAG-G+1xDIV58 and PANEXPL58

SUGGESTED OPTIONAL ACCESSORIES	
5822-5823	2x BAG-G
PANEXPL58	
2x DIV58	1x BAG-G + 1x DIV58



5833		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	580	440	330	60	270						
	in	22 13/16	17 5/16	13	2 3/8	10 5/8						
External dim.	mm	670	510	372								
	in	26 3/8	20 1/16	14 5/8								
Weight empty	kg	10,54		lbs 23.23								
Weight w/foam	kg	12,65		lbs 27.88								
Volume	lt	84,2		gal 22.19								
Buoyancy	kg/max	62,0		lbs/max 136.68								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
	MIL-STD 810F											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles
- Stainless steel padlockable points
- Self-oiling free running wheels
- Soft grip rubber handle
- Can accommodate 1xDIV58.1+1xDIV58+2xDIV58.2, 2xDIV58+2xDIV58.2, 2xDIV58.1, 1xBAG-G+1xDIV58.2+1xDIV58.1, 2xBAG-G+2xDIV58.2, PANEXPL58

SUGGESTED OPTIONAL ACCESSORIES	
5833	1x DIV58.1 + 1x DIV58 + 1x DIV58.2
PANEXPL58	
2x DIV58 + 2x DIV58.2	2x DIV58.1
1x BAG-G + 1x DIV58.2 + 1x DIV58.1	2x BAG-G + 2x DIV58.2

TOUGH WORLD



Retractable handle

HL SERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

7626HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	763	399	260	50	210						
	in	30 1/16	15 11/16	10 1/4	1 15/16	8 1/4						
External dim.	mm	832	466	279								
	in	32 3/4	18 3/8	11								
Weight empty	kg 7,7			lbs		16.97						
Weight w/foam	kg 9,5			lbs		20.94						
Volume	lt 79,2			gal		20.92						
Buoyancy	kg/max 57,5			lbs/max		126.76						
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Stainless steel reinforced padlockable points
- Large front handle



Automatic purge valve




Two men lift side handles



Wider pull release latches



Shipping label holder



Large self-oiling free running wheels

TO PROTECT YOUR MOST



7630		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	765	485	305	60	245						
	in	30 1/8	19 1/8	12	2 3/8	9 5/8						
External dim.	mm	860	560	355								
	in	33 7/8	22 1/16	14								
Weight empty	kg 13,56			lbs 29.89								
Weight w/foam	kg 16,39			lbs 36.13								
Volume	lt 113,1			gal 29.85								
Buoyancy	kg/max 81,8			lbs/max 180.33								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
	MIL-STD 810F - ATA 300											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Side handles and large front handle
- Stainless steel reinforced padlockable points
- Self-oiling free running wheels
- Can accommodate 4xBAG-L, 2xBAG-M, 2xBAG-L+1xBAG-M, 2xDIV7630 or 2xBAG-L+1xDIV7630 and PANEXPL76



Two men lift side handles



SUGGESTED OPTIONAL ACCESSORIES	
7630	4x BAG-L
PANEXPL76	
2x DIV7630	2x BAG-M
2x BAG-L + 1x DIV7630	2x BAG-L + 1x BAG-M

VALUABLE ITEMS



Retractable handle

HL SERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

7635HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	763	399	350	50	300
	in	30 1/16	15 11/16	13 3/4	1 15/16	11 13/16
External dim.	mm	832	466	369		
	in	32 3/4	18 3/8	14 1/2		
Weight empty	kg 9,4			lbs	20.72	
Weight w/foam	kg 11,8			lbs	26.01	
Volume	lt 106,6			gal	28.16	
Buoyancy	kg/max 82,2			lbs/max	181.22	
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Version	B	O	G	D	N	Y
Color						


- Stainless steel reinforced padlockable points
- Large front handle



Automatic purge valve




Two men lift side handles



Wider pull release latches



Shipping label holder



Large self-oiling free running wheels



Explorer Cases are available in a wide selection of sizes, up to 6 colours and two main standard configurations available: empty or with “pick & pluck” foam layers. Special colours are available on request depending on quantity. The clean internal volume provides the ideal solution to create a custom foam fitting. In addition the cases are moulded with special “slots”, fixing points where a mechanical fixing with the case can be easily achieved by using the optional exclusive hardware.



Two men lift side handles



7641		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	765	485	415	60	355						
	in	30 1/8	19 1/8	16 5/16	2 3/8	14						
External dim.	mm	860	560	460								
	in	33 7/8	22 1/16	18 1/8								
Weight empty	kg 15,02			lbs 33.11								
Weight w/foam	kg 18,87			lbs 41.60								
Volume	lt 153,9			gal 40.41								
Buoyancy	kg/max 118,5			lbs/max 261.24								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
	MIL-STD 810F											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Wheels and retractable handle
- Stainless steel reinforced padlockable points
- Can accommodate 4xBAG-O, 2xBAG-P, 2xBAG-O+1xBAG-P, 2xDIV7641, 2xBAG-O+1xDIV7641 and PANEXPL76

SUGGESTED OPTIONAL ACCESSORIES	
7641	4x BAG-O
PANEXPL76	
2x DIV7641	2x BAG-P
2x BAG-O + 1x DIV7641	2x BAG-O + 1x BAG-P

LIGHTWEIGHT ON THE GO

Fold flat carry handle



Automatic purge valve

HL SERIES HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

7726		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	770	580	265	90	175						
	in	30 5/16	22 13/16	10 7/16	3 9/16	6 7/8						
External dim.	mm	836	641	304								
	in	32 15/16	25 1/4	11 15/16								
Weight empty	kg	10,30		lbs 22.70								
Weight w/foam	kg	12,60		lbs 27.77								
Volume	lt	118		gal 31.17								
Buoyancy	kg/max	70		lbs/max 154.32								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Large front handle
- Side handles
- Self-oiling wheels
- Stainless steel padlockable points
- Can accommodate 2xDIV77 and PANEXPL77

SUGGESTED OPTIONAL ACCESSORIES	
7726	2x DIV77
PANEXPL77	

Shipping label holder

Retractable handle



Automatic purge valve

HL SERIES HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

7745		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	770	580	450	90	360						
	in	30 5/16	22 13/16	17 11/16	3 9/16	14 3/16						
External dim.	mm	836	641	489								
	in	32 15/16	25 1/4	19 1/4								
Weight empty	kg	15,50		lbs 34.17								
Weight w/foam	kg	19,80		lbs 43.65								
Volume	lt	200		gal 52.83								
Buoyancy	kg/max	144		lbs/max 317.47								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Large front handle
- Side handles
- Self-oiling wheels
- Stainless steel padlockable points
- Can accommodate 4xDIV77, 2xDIV7745, 1xDIV7745+2xDIV77 and PANEXPL77

SUGGESTED OPTIONAL ACCESSORIES	
7745	4x DIV77
PANEXPL77	
2x DIV7745	1x DIV7745 + 2x DIV77

Shipping label holder



HLSERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

7814HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	780	350	145	42	103						
	in	30 11/16	13 3/4	5 11/16	1 5/8	4 1/16						
External dim.	mm	846	427	167								
	in	33 5/16	16 13/16	6 9/16								
Weight empty	kg 5,50			lbs 12.12								
Weight w/foam	kg 6,40			lbs 14.10								
Volume	lt 39,6			gal 10.46								
Buoyancy	kg/max 25,3			lbs/max 55.77								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Optional shoulder strap available (Art. SHOULDERKIT.U)



Two side handles for easier transportation

Stainless steel reinforced padlockable points

Rubber grip handle



Automatic purge valve



New pull release latch grants additional safety, drop test proof

XL WATERPROOF CASES



New pull release latches



Wheels with bearings

Automatic purge valve

9413		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	936	350	135	42	93						
	in	36 7/8	13 3/4	5 5/16	1 5/8	3 11/16						
External dim.	mm	987	414	158								
	in	3 11/16	16 5/16	6 1/4								
Weight empty		kg 6,70		lbs 14.77								
Weight w/foam		kg 7,70		lbs 16.97								
Volume		lt 45,3		gal 11.96								
Buoyancy		kg/max 27,9		lbs/max 61.50								
Temp. rating		°C min -33 max +90		°F min -27.4 max +194								
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)										
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)



3-digits locks on demand (case code + DL)



Automatic purge valve

9433		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	936	350	330	42	288						
	in	36 7/8	13 3/4	13	1 5/8	11 5/16						
External dim.	mm	1009	412	354								
	in	39 3/4	16 1/4	13 15/16								
Weight empty	kg 10,20			lbs 22.48								
Weight w/foam	kg 12,70			lbs 27.99								
Volume	lt 108			gal 28.53								
Buoyancy	kg/max 84,9			lbs/max 187.17								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles and large front handle
- Large self oiling free running wheels



3-digits locks on demand (case code + DL)



New pull release latches and stainless steel padlockable points



Shipping label holder

A WIDE RANGE



Automatic
purge valve

11413		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	1136	350	135	42	93						
	in	44 3/4	13 3/4	5 5/16	1 5/8	3 11/16						
External dim.	mm	1189	415	159								
	in	46 13/16	16 5/16	6 1/4								
Weight empty	kg 7,80			lbs 17.19								
Weight w/foam	kg 8,80			lbs 19.40								
Volume	lt 53,7			gal 14.18								
Buoyancy	kg/max 33,3			lbs/max73.41								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- New pull release latches
- Wheels with bearings
- Optional shoulder strap available (Art. SHOULDERKIT.U)



3-digits locks on
demand
(case code + DL)



Automatic
purge valve

13513		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	1350	350	135	42	93						
	in	53 1/8	13 3/4	5 5/16	1 5/8	3 11/16						
External dim.	mm	1430	415	159								
	in	56 5/16	16 5/16	6 1/4								
Weight empty	kg 8,70			lbs 19.18								
Weight w/foam	kg 9,95			lbs 21.93								
Volume	lt 63,7			gal 16.82								
Buoyancy	kg/max 39,5			lbs/max87.08								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- New pull release latches
- Wheels with bearings
- Optional shoulder strap available (Art. SHOULDERKIT.U)



3-digits locks on
demand
(case code + DL)



TO CHOOSE FROM



Automatic
purge valve

13527		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	1350	350	272	42	230						
	in	53 1/8	13 3/4	10 11/16	1 5/8	9 1/16						
External dim.	mm	1430	415	296								
	in	56 5/16	16 5/16	11 5/8								
Weight empty	kg 11,70			lbs 25.79								
Weight w/foam	kg 14,90			lbs 32.84								
Volume	lt 128,5			gal 33.94								
Buoyancy	kg/max 97,5			lbs/max 214.95								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- 6 wheels with bearings



3-digits locks on
demand
(case code + DL)



New wide pull release
latches



Two men lift side
handles



3-digits locks on
demand
(case code + DL)



Double automatic
purge valves

15416		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	1540	377	160	42	118						
	in	60 5/8	14 13/16	6 5/16	1 5/8	4 5/8						
External dim.	mm	1629	456	183								
	in	64 1/8	17 15/16	7 3/16								
Weight empty	kg	11,30		lbs 24.91								
Weight w/foam	kg	13,40		lbs 29.54								
Volume	lt	92,9		gal 24.54								
Buoyancy	kg/max	61,6		lbs/max 135.80								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Self-oiling free running wheels
- Stainless steel reinforced padlockable points



Plastic latches
and stainless
steel reinforced
padlockable points



Optional 3-digits
locks
(case code + DL)



Two men lift side
handles



Automatic purge
valve



4 self-oiling free
running wheels



10826		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1080	620	260	60	200
	in	42 1/2	24 7/16	10 1/4	2 3/8	7 7/8
External dim.	mm	1178	725	287		
	in	46 3/8	28 1/4	11 5/16		
Weight empty	kg	17				lbs 37.47
Weight w/foam	kg	20,40				lbs 44.97
Weight w/multi weapons foam	kg	19,60				lbs 43.21
Volume	lt	174				gal 45.96
Buoyancy	kg/max	120,6				lbs/max 265.87
Temp. rating	°C	min -33	max +90			°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Version	B	O	G	D	N	Y
Color						

ROOMY AND RUGGEDIZED



Optional 3-digits locks (case code + DL)



12 Heavy duty metal latches



4 self-oiling free running wheels



Automatic purge valve



Art. PANDIV.10840 Optional.
To hold the lid foam content steady in place.
The kit includes:
- 1 alveolar polypropylene sheet
- 4 velcro straps
- 8 metal loops and fixing hardware

10840		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1080	620	400	200	200
	in	42 1/2	24 7/16	15 3/4	7 7/8	7 7/8
External dim.	mm	1178	718	427		
	in	46 3/8	28 1/4	16 13/16		
Weight empty	kg	19,80		lbs 43.65		
Weight w/foam	kg	26,30		lbs 57.32		
Weight w/multi weapons foam	kg	25,00		lbs 55.11		
Volume	lt	260		gal 68.68		
Buoyancy	kg/max	120,6		lbs/max 265.87		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Version	B	O	G	D	N	Y
Color						

- Detachable lid for easier access
- Folding side handles on both shells
- Two men lift large folding side handles

ACCESSORIES FOR PHOTO

PHOTO DIVIDERS

Modular dividers to protect and transport sensitive equipment.



DIV1908 (fits mod. 1908)
Ext. Dim. 185x120x65 mm.
7 5/16 x 4 3/4 x 2 9/16 in.



DIV1913 (fits mod. 1913)
Ext. Dim. 185x120x115 mm.
7 5/16 x 4 3/4 x 4 1/2 in.



DIV2209 (fits mod. 2209)
Ext. Dim. 215x155x75 mm.
8 7/16 x 6 1/8 x 2 15/16 in.



DIV2214 (fits mod. 2214)
Ext. Dim. 215x155x125 mm.
8 7/16 x 6 1/8 x 4 15/16 in.



DIV2712 (fits mod. 2712-2712HL)
Ext. Dim. 270x195x80 mm.
10 5/8 x 7 11/16 x 3 1/8 in.



DIV2717 (fits mod. 2717-2717HL)
Ext. Dim. 270x195x125 mm.
10 5/8 x 7 11/16 x 4 15/16 in.



DIV3317 (fits mod. 3317-3317HL)
Ext. Dim. 325x230x100 mm.
12 13/16 x 9 1/16 x 3 15/16 in.



DIV3317W (fits mod. 3317W)
Ext. Dim. 325x340x100 mm.
12 13/16 x 13 3/8 x 3 15/16 in.



DIV3818 (fits mod. 3818-3818HL)
Ext. Dim. 375x265x130 mm.
14 3/4 x 10 7/16 x 5 1/8 in.



DIV4412 (fits mod. 4412-4412HL)
Ext. Dim. 440x330x80 mm.
17 5/16 x 13 x 3 1/8 in.



DIV4419 (fits mod. 4419-4419HL)
Ext. Dim. 440x330x135 mm.
17 5/16 x 13 x 5 5/16 in.



DIV4820 (fits mod. 4820-4820HL-4825HL)
Ext. Dim. 475x365x145 mm.
18 11/16 x 14 3/8 x 5 11/16 in.



DIV51 (fits mod. 5117-5122)
Ext. Dim. 510x265x120 mm.
20 1/16 x 10 7/16 x 4 3/4 in.



DIV52 (fits mod. 5218HL-5221HL)
Ext. Dim. 515x275x120 mm.
20 1/4 x 10 13/16 x 4 3/4 in.



DIV53 (fits mod. 5325-5326)
Ext. Dim. 520x395x100 mm.
20 1/2 x 15 9/16 x 3 15/16 in.



DIV58 (fits mod. 5822-5823-5833)
Ext. Dim. 430x275x155 mm.
16 15/16 x 10 13/16 x 6 1/8 in.



DIV58.1 (fits mod. 5833)
Ext. Dim. 430x275x265 mm.
16 15/16 x 10 13/16 x 10 7/16 in.



DIV58.2 (fits mod. 5833)
Ext. Dim. 430x275x110 mm.
16 15/16 x 10 13/16 x 0 7/16 in.



DIV7630 (fits mod. 7630)
Ext. Dim. 470x375x240 mm.
18 1/2 x 14 3/4 x 9 7/16 in.



DIV7641 (fits mod. 7641)
Ext. Dim. 470x375x345 mm.
18 1/2 x 14 3/4 x 13 9/16 in.



DIV77 (fits mod. 7726)
Ext. Dim. 570x375x175 mm.
22 7/16 x 14 3/4 x 6 7/8 in.



DIV7745 (fits mod. 7745)
Ext. Dim. 580x370x345 mm.
22 13/16 x 14 9/16 x 13 9/16 in.



DRONE DIVIDER

DIVIDER FOR LARGER DRONES
Internal adjustable partitions

DRN77 (fits mod. 7745)
Ext. Dim. 740x570x350 mm.
29 1/8 x 22 7/16 x 13 3/4 in.
(COV77 included).



Elastic bands with Velcro to help fixing small equipment.
Always included with the dividers.

*Color of the interior fabric may be different.

AND VIDEO PRO'S



COVERS FOR DIVIDERS

Top covers are available for larger models (on demand).

COV44 (fits mod. 4412-4412HL-4419-4419HL)
COV48-76 (fits mod. 4820-4820HL-7630-7641)
COV51 (fits mod. 5117-5122)
COV53 (fits mod. 5325-5326)
COV58 (fits mod. 5822-5823-5833)
COV77 (fits mod. 7726-7745)



PHOTO AND DRONE BACKPACKS



DRN44 (fits mod. 4419-4419HL)
Ext. Dim. 340x180x440 mm.
13 3/8 x 7 1/16 x 17 5/16 in.



DRN53 (fits mod. 5326)
Ext. Dim. 430x250x540 mm.
16 15/16 x 9 13/16 x 21 1/4 in.



<< DRONE
BACKPACKS
Internal removable
pouches for
accessories



BPH44 (fits mod. 4419-4419HL)
Ext. Dim. 340x180x440 mm.
13 3/8 x 7 1/16 x 17 5/16 in.



BPH53 (fits mod. 5326)
Ext. Dim. 430x250x540 mm.
16 15/16 x 9 13/16 x 21 1/4 in.



<< PHOTO
BACKPACKS
Internal
adjustable
dividers



*Color of the interior fabric may be different.

BACKPACK CABIN Available as an accessory

This practical kit adds backpack transportability to the models 5218HL and 5221HL. Generously and ergonomically padded for maximum comfort. Detachable lap belt. Quickly attachable and removable.





LID PANELS

Practical and robust lid panels with zippered pouches and velcro-ed compartments, ideal for stowing all kinds of accessories, cables and documents.



PANEXPL27
(fits mod. 2712-2717)
Dim. 255x180 mm.
10 1/16 x 7 1/16 in.



PANEXPL27HL
(fits mod. 2712HL-2717HL)
Dim. 255x178 mm.
10 1/16 x 7 in.



PANEXPL33
(fits mod. 3317)
Dim. 310x215 mm.
12 3/16 x 8 7/16 in.



PANEXPL33HL
(fits mod. 3317HL)
Dim. 295x184 mm.
11 5/8 x 7 1/4 in.



PANEXPL33W
(fits mod. 3317W)
Dim. 310x320 mm.
12 3/16 x 12 5/8 in.



PANEXPL38
(fits mod. 3818)
Dim. 375x225 mm.
14 3/4 x 8 7/8 in.



PANEXPL38HL
(fits mod. 3815HL-18HL-23HL)
Dim. 357x243 mm.
14 1/16 x 9 9/16 in.



PANEXPL42
(fits mod. 4209HL-4216HL)
Dim. 405x273 mm.
15 15/16 x 10 3/4 in.



PANEXPL44
(fits mod. 4412-4419)
Dim. 422x295 mm.
16 5/8 x 11 5/8 in.



PANEXPL44HL
(fits mod. 4412HL-4419HL)
Dim. 420x318 mm.
16 9/16 x 12 1/2 in.



PANEXPL48
(fits mod. 4820)
Dim. 475x325 mm.
18 1/16 x 12 13/16 in.



PANEXPL48HL
(fits mod. 4820HL-4825HL)
Dim. 458x341 mm.
18 1/16 x 13 7/16 in.



PANEXPL51
(fits mod. 5117-5122)
Dim. 500x230 mm.
19 11/16 x 9 1/16 in.



PANEXPL52
(fits mod. 5212-15-18-21HL)
Dim. 505x270 mm.
19 7/8 x 10 5/8 in.



PANEXPL53
(fits mod. 5325-5326)
Dim. 525x390 mm.
20 11/16 x 15 3/8 in.



PANEXPL58
(fits mod. 5822-23-33)
Dim. 575x395 mm.
22 5/8 x 15 9/16 in.



PANEXPL76
(fits mod. 7630-7641)
Dim. 755x440 mm.
29 3/4 x 17 5/16 in.



PANEXPL77
(fits mod. 7726-7745)
Dim. 720x530 mm.
28 3/8 x 20 7/8 in.

AND PADDED BAGS

Highly durable padded bags with rubber coated handles and waterproof zipper with lockable velcro pull zippers. Practical external front pouch for documents, removable shoulder strap (on certain models) and rubber feet on the bottom to grant better grip. Internal adjustable padded dividers for flexible configurations. Ideal to protect sensitive equipment (ie electronic, photographic, broadcasting, medical etc.)



BAG-R (fits mod. 2712-2712HL)
Ext. Dim. 275x195x80 mm.
10 13/16 x 7 11/16 x 3 1/8 in.



BAG-S (fits mod. 2717-2717HL)
Ext. Dim. 275x195x135 mm.
10 13/16 x 7 11/16 x 5 5/16 in.



BAG-T (fits mod. 3317-3317HL)
Ext. Dim. 325x225x100 mm.
12 13/16 x 8 7/8 x 3 15/16 in.



BAG-U (fits mod. 3317W)
Ext. Dim. 330x350x95 mm.
13 x 13 3/4 x 3 3/4 in.



BAG-E (fits mod. 3818-3818HL)
Ext. Dim. 375x265x130 mm.
14 3/4 x 10 7/16 x 5 1/8 in.



BAG-PC42 (fits mod. 4209HL)
Ext. Dim. 425x315x65 mm.
16 3/4 x 12 3/8 x 2 9/16 in.




BAG-PC44 (fits mod. 4412-4412HL)
Ext. Dim. 455x345x85 mm.
17 15/16 x 13 9/16 x 3 3/8 in.



BAG-A (fits mod. 4419-4419HL)
Ext. Dim. 445x345x140 mm.
17 1/2 x 13 9/16 x 5 1/2 in.



BAG-F (fits mod. 4820-4820HL-4825HL)
Ext. Dim. 480x370x150 mm.
18 7/8 x 14 9/16 x 5 7/8 in.

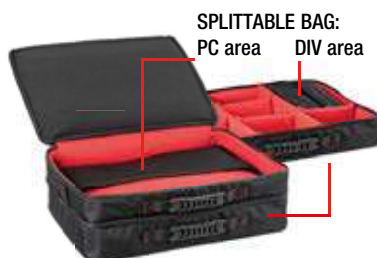

BAG-PC48 (fits mod. 4820-4820HL-4825HL)
Ext. Dim. 480x355x165 mm.
18 7/8 x 14 x 6 1/2 in.

SPLITTABLE BAG:
PC area DIV area



BAG-B (fits mod. 5117-5122)
Ext. Dim. 520x275x110 mm.
20 1/2 x 10 13/16 x 4 5/16 in.



BAG-V (fits mod. 5325-5326)
Ext. Dim. 535x400x90 mm.
21 1/16 x 15 3/4 x 3 9/16 in.



BAG-G (fits mod. 5822-5823-5833)
Ext. Dim. 430x285x160 mm.
16 15/16 x 11 1/4 x 6 5/16 in.



BAG-L (fits mod. 7630)
Ext. Dim. 385x250x240 mm.
15 3/16 x 9 13/16 x 9 7/16 in.



BAG-M (fits mod. 7630)
Ext. Dim. 755x240x250 mm.
29 3/4 x 9 7/16 x 9 13/16 in.



BAG-O (fits mod. 7641)
Ext. Dim. 385x240x360 mm.
15 3/16 x 9 7/16 x 14 3/16 in.



BAG-P (fits mod. 7641)
Ext. Dim. 755x240x360 mm.
29 3/4 x 9 7/16 x 14 3/16 in.



Elastic bands with Velcro
to help fixing small equipment.
Always included with the bags.

*Color of the interior fabric may be different.

WIDE RANGE OF

TRIPOD BAG90

Padded tripod bag in tear resistant fabric. Adjustable shoulder strap and frontal pouch for accessories. Ideal to protect and transport professional tripods for cameras and video cameras.



Ext. Dim. 900x170 max/140 min x 100 mm.
35 7/16x6 11/16 max/5 1/2 min x 3 5/16 in.

TRIPODISC

Patented, smart accessory that allows to attach a small or midsize EXPLORERCASE to a standard 1/4" thread tripod. The assembly is very easy: just follow the provided instruction, make a hole in the bottom of the case and secure together the two metal discs; the watertight feature remains granted by the discs O-ring.



Developed for any activity where a case needs to be standing at a higher position: laptop computer, drones, audio-video equipment.



TOP ENVELOPE 15

Protective sleeve for PC 15"-15.6"

Ext. Dim. 400x270x30 mm.
15 3/4 x 10 5/8 x 1 3/16 in.

A CASE YOU CAN WEAR

The most innovative backpack carrying system for waterproof cases. A simple concept to quickly turn a case into a backpack. It allows to protect sensitive equipment and at the same time to get all the convenience of a hands-free backpack. Available in 2 sizes.



BACKPACK M FITS MOD. 3317, 3317HL, 3815HL, 3818, 3818HL, 3823HL, 4209HL, 5117.

BACKPACK L FITS MOD. 3317W, 4216HL, 4412, 4412HL, 4419, 4419HL, 4820, 4820HL, 5122, 5218HL, 5221HL.

CUSTOM OPTIONS

MOUNTING BRACKETS


Our flexible manufacturing process allows us to easily and efficiently make your OEM case developing specific interiors to meet your requirements.




Art. KIT SUPP.PLAST (6 pcs.)



Art. KIT SUPP.EXPL (6 pcs.)

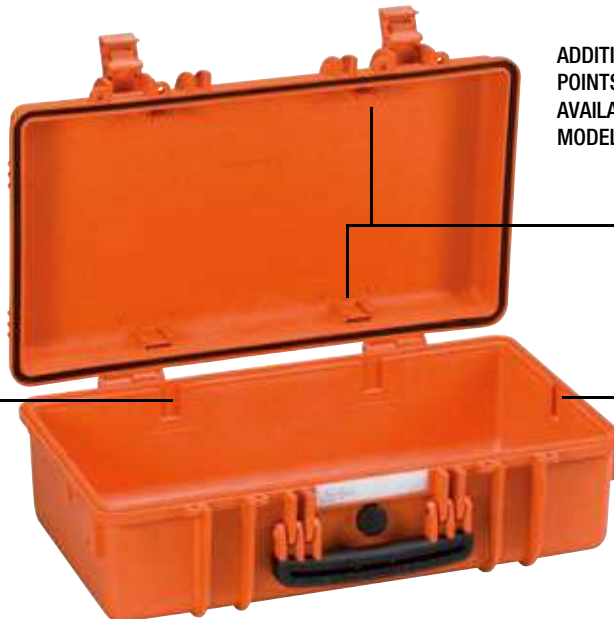

ADDITIONAL FIXING POINTS ON THE LID AVAILABLE ON CERTAIN MODELS



Art. KIT.EXPL.PLUGS (6 pcs.)

ALL MODELS (EXCEPT FOR THE 1908) ARE INTERNALLY EQUIPPED WITH SPECIFIC SLOTS, TO APPLY THE OPTIONAL METAL OR PLASTIC BRACKETS WHICH PROVIDE EITHER A PANEL'S FIXING POINTS OR A FIX MECHANICAL JOINT INSIDE THE CASE, TO BUILD MORE COMPLETE APPLICATIONS. THIS WAY THE CASE BECOMES A REAL WORKSTATION, RATHER THAN JUST A CARRYING CONTAINER. AS THE PANEL MOUNTING BRACKETS ARE MECHANICALLY FIXED BY SCREWS, THEY CAN BE REMOVED WHEN NECESSARY. THE DEDICATED SCREWS ALLOW THE CASE TO REMAIN WATERPROOF, AND HELP THE PANELS TO BE REMOVED EASILY AND QUICKLY.

THE SLOTS CAN BE CLOSED BY SPECIAL PLASTIC BLIND INSERTS THAT WILL GIVE THE CASE A BETTER AND FINISHED INTERIOR LOOK.

PANEL FRAMES

USER FRIENDLY PANEL FRAMES, THEY CAN BE USED TO FIX SEVERAL KIND OF PANELS, FROM PLASTIC TO ALUMINUM ONES.

EQUIPPED WITH AN ADDITIONAL GASKET, THEY CAN PROVIDE THE CASE WITH A PERFECT INSTRUMENTATION SURFACE AND A FURTHER HUMIDITY AND DUST RESISTANCE WHEN THE CASE IS USED IN THE FIELD. COMPLETELY REMOVABLE, RESISTANT AND LIGHT, THESE PANEL RINGS HELP TO TRANSFORM THE EXPLORER CASES INTO PRACTICAL WORKSTATIONS.



Art. PANRING27, PANRING27.USA, PANRING33, PANRING33.USA, PANRING38, PANRING38.USA, PANRING38HL, PANRING38HL.USA, PANRING42, PANRING42.USA, PANRING44, PANRING44.USA, PANRING44HL, PANRING44HL.USA, PANRING48, PANRING48.USA, PANRING48HL, PANRING48HL.USA, PANRING51, PANRING51.USA, PANRING52, PANRING52.USA.

PADLOCKS

PATENTED PADLOCKS DESIGNED TO FIT SNUG TO THE EXPLORER CASES SHAPE SO AS NOT TO SWING OUT.



PATENTED HEAVY DUTY BRASS PADLOCK
(Art. EXPL PADLOCK)



PATENTED COMBINATION PADLOCK
(Art. EXPL COMBILOCK)



TSA LOCK™ COMBI PADLOCK
(Art. EXPL TSA.DIGILOCK)

TSA LOCK™ PADLOCKS ALLOW AIRPORT SECURITY AGENTS TO OPEN THE CASE WITHOUT DESTROYING THE LOCK.



KIN.1490 >>>
Optional 50 mm
key latch for
Explorer Cases
(please enquire)

Our cases can be molded in any color* of your choice or with special copolymer complying with Fire-resistance ratings, ESD, and other specifications.

Based on our extensive knowledge in the packaging and protection of delicate instruments, we are able to create the most suitable and cost-effective solutions for your requirements. Do not hesitate to get in touch with us for any technical or commercial query.



Custom foam possible for all sizes



Custom printings available



Panel mounting available



Customization for special application



Special labelling on demand



We can bring to life your special case requirement

OTHER CONTAINERS



Art. KIT TRAY MUB
Optional tray with
removable divider for
tools, instruments or
spare parts.
MUB78 can fit up to
two trays.
Elasticated bands for
the tray also available
(Art. KIT03).



WATER RESISTANT

MUB78		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	780	410	330	50	280
	in	30 11/16	16 1/8	13	1 15/16	11
External dim.	mm	807	470	345		
	in	31 3/4	18 1/2	13 9/16		
Weight empty	kg	6,30			lbs 13.88	
Volume	lt	89			gal 23.51	
Buoyancy	kg/max	80,5			lbs/max 177.47	
Versions	MUB78	MUB78.GE	MUB78.DE			
Color						

- Empty
- Lightweight
- Moulded high impact polypropylene
- Integral lifting points on both ends
- Full length steel hinge pin to lid
- Use in high/low temp environments
- Slide out ID nameplate holder
- Large fold flat carry handle
- Padlocking provision
- Stacking location points



MUB65		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	653	340	312	65	247
	in	25 11/16	13 3/8	12 5/16	2 9/16	9 3/4
External dim.	mm	678	404	331		
	in	26 11/16	15 7/8	13 1/16		
Weight empty	kg	4,40			lbs 9.70	
Volume	lt	61,5			gal 16.24	
Buoyancy	kg/max	42,7			lbs/max 94.13	
Versions	MUB65					
Color						

- Empty
- Lightweight
- Moulded high impact polypropylene
- Integral lifting points on both ends
- Full length steel hinge pin to lid
- Use in high/low temp environments
- Slide out ID nameplate holder
- Large front handle
- Padlocking provision
- Stacking location points



Free running wheels



WATER RESISTANT



GUNCASE.B CV

GUNCASE		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	925	420	120	60	60
	in	36 7/16	16 9/16	4 3/4	2 3/8	2 3/8
External dim.	mm	1078	475	157		
	in	42 7/16	18 11/16	6 3/16		
Weight empty	kg	7,1			lbs 15.65	
Weight w/foam	kg	8,1			lbs 17.85	
Volume	lt	46,6			gal 12.31	
Versions	GUNCASE.B	GUNCASE.BE	GUNCASE.B CV			
Color						

- 4 easy action quick release "up&over" latches (2 with combi locks)
- Manual pressure release valve



Strong metal carry handle

TECHNICAL SPECIFICATIONS

	CASE MODEL	COLORS					REMOV. LID	WHEELS	INTERNAL CONFIG.	WEIGHT KG	BUOYANCY KG MAX *	VOLUME LITRES	INT. DIM. (mm)				EXT. DIM. (mm)			
		BLACK	ORANGE	GREEN	B.SAND	BLUE N.							YELLOW	L	W	D	LID	BASE	L	W
	1908	BE	OE	GE					EMPTY	0,7	1,4	2	190	125	85	20	65	216	180	102
	1913	B	O	G					W/FOAM	0,8										
		BE	OE	GE					EMPTY	0,85	2,4	3,2	190	125	135	20	115	216	180	152
	2209	B	O	G					W/FOAM	0,92										
	2214	BE	OE	GE					EMPTY	0,88	2,3	3,3	220	160	95	20	75	246	215	112
		BE	OE	GE					W/FOAM	0,99										
	B	O	G						EMPTY	1,16	3,9	5,1	220	160	145	20	125	246	215	162
	2712	BE	OE	GE				✓	W/FOAM	1,29										
		B	O	G					EMPTY	1,62	4,2	6,6	276	200	120	35	85	305	270	144
	2712HL	BE	OE	GE	DE	NE	YE	✓	W/FOAM	1,83										
		B	O	G	D	N	Y		EMPTY	1,32	4,2	6,6	276	200	120	35	85	316	270	143
	2717	BE	OE	GE				✓	W/FOAM	1,46										
		B	O	G					EMPTY	1,93	6,7	9,3	276	200	170	35	135	305	270	194
	2717HL	BE	OE	GE	DE	NE	YE	✓	W/FOAM	2,12										
		B	O	G	D	N	Y		EMPTY	1,54	6,7	9,4	276	200	170	35	135	316	270	192
	3005	BE	OE	GE	DE				W/FOAM	1,75										
		B	O	G	D				EMPTY	1,1	2,1	4	300	210	58	20	38	326	269	75
	3110HL	BE	OE	GE	DE			✓	W/FOAM	1,2										
		B	O	G	D				EMPTY	0,95	2,5	3,4	310	100	108	20	88	336	159	127
	3317	BE	OE	GE				✓	W/FOAM	1,05										
		B	O	G					EMPTY	2,29	7	13,1	330	234	170	68	102	360	304	194
	3317HL	BE	OE	GE	DE	NE	YE	✓	W/FOAM	2,51										
		B	O	G	D	N	Y		EMPTY	1,78	7,1	13,1	330	234	170	68	102	360	304	192
	3317W	BE	OE	GE				✓	W/FOAM	2,02										
		B	O	G					EMPTY	2,92	10,6	19,6	330	350	170	68	102	360	420	194
	3815HL	BE	OE	GE	DE	NE	YE	✓	W/FOAM	3,3										
		B	O	G	D	N	Y		EMPTY	2,2	10	15,9	380	270	155	47	108	420	340	177
	3818	BE	OE	GE					W/FOAM	2,53										
		B	O	G					EMPTY	3,14	12,4	18,4	380	270	180	47	133	410	340	205
	3818HL	BE	OE	GE	DE	NE	YE	✓	W/FOAM	3,58										
		B	O	G	D	N	Y		EMPTY	2,26	12,3	18,5	380	270	180	47	133	420	340	202
	3823HL	BE	OE	GE	DE	NE	YE	✓	W/FOAM	2,66										
		B	O	G	D	N	Y		EMPTY	2,59	16	23,6	380	270	230	57	173	420	340	252
	4209HL	BE	OE	GE	DE			✓	W/FOAM	3,09										
		B	O	G	D				EMPTY	2,2	6,8	12	420	300	95	35	60	457	366	118
	4216HL	BE	OE	GE	DE			✓	W/FOAM	2,6										
		B	O	G	D				W/PC BAG	2,8	14,2	20,6	420	300	160	35	125	457	366	183
	4412	BE	OE	GE			✓	W/FOAM	2,6											
		B	O	G					EMPTY	3,2	10,7	19,2	445	345	125	47	78	474	415	149
	4412HL	BE	OE	GE	DE	NE	YE	✓	W/FOAM	3,4										
		B	O	G	D	N	Y		EMPTY	2,5	10,8	19,2	445	345	125	47	78	485	414	149
	4419	BC		GC					W/PC BAG	3,22										
		BE	OE	GE				✓	EMPTY	4	19,7	29,2	445	345	190	47	143	474	415	214
		B	O	G					W/FOAM	4,7										
	4419HL	BE	OE	GE	DE	NE	YE	✓	EMPTY	4,7										
		B	O	G	D	N	Y		EMPTY	2,91	19,8	29,2	445	345	190	47	143	485	414	212
	4820	BE	OE	GE					W/FOAM	3,58										
		B	O	G					EMPTY	4,64	24,7	35,5	480	370	205	50	155	520	435	230
	4820HL	BE	OE	GE	DE	NE	YE		W/FOAM	5,4										
		B	O	G	D	N	Y		EMPTY	3,41	24,8	36,4	480	370	205	50	155	520	440	230
	4825HL	BE	OE	GE	DE	NE	YE	✓	W/FOAM	4,17										
		B	O	G	D	N	Y		EMPTY	4,5	28,2	39	480	370	255	50	205	520	440	276
	5116	BE	OE	GE			✓	W/FOAM	5,3											
		B	O	G					EMPTY	3,5	15,1	24,4	516	296	160	50	110	585	368	198
	5117	BE	OE	GE			✓	W/FOAM	4											
		B	O	G					EMPTY	3,8	15,8	24,7	517	277	173	50	123	546	347	197
	5122	BE	OE	GE			✓	W/FOAM	4,5											
		B	O	G					EMPTY	6	21,5	31	517	277	217	50	167	546	347	247
	5131	BE	OE	GE			✓	W/FOAM	7											
		B	O	G					EMPTY	5	34,4	47,3	516	296	310	60	250	585	368	348
	5140	BKT01-AH							W/FOAM FILLED DRAWERS	5,5										
		BKT02-AH						✓	W/EMPTY DRAWERS	13										
		BKT03-AH							W/EMPTY DRAWERS	13,8										
		BKTE-AH						✓	AIDRAW READY	9,75										
		BE-AH							COMPLETELY EMPTY	7,52										
		X.B							AIBOX READY	9,75										
	5212HL	BE	OE	GE	DE			✓	EMPTY	4,64										
		B	O	G	D				W/FOAM	2,35	12,7	18,5	520	285	125	30	95	550	350	145
	5215HL	BE	OE	GE	DE			✓	W/FOAM	2,85										
		B	O	G	D				EMPTY	2,55	12,7	22,2	520	285	150	55	95	550	350	170
	5218HL	BE	OE	GE	DE			✓	W/FOAM	3,05										
		B	O	G	D				EMPTY	3,75	20	26	520	285	180	30	150	550	350	200
	5221HL	BE	OE	GE	DE			✓	W/FOAM	4,3										
		B	O	G	D				EMPTY	3,9	20	30,3	520	285	205	55	150	550	350	225
	5325	BE	OE	GE			✓	W/FOAM	4,5											
		B	O	G					EMPTY	7	37,2	53	538	405	250	60	190	607	475	275
	5326	BE	OE	GE			✓	W/FOAM	8,25											